
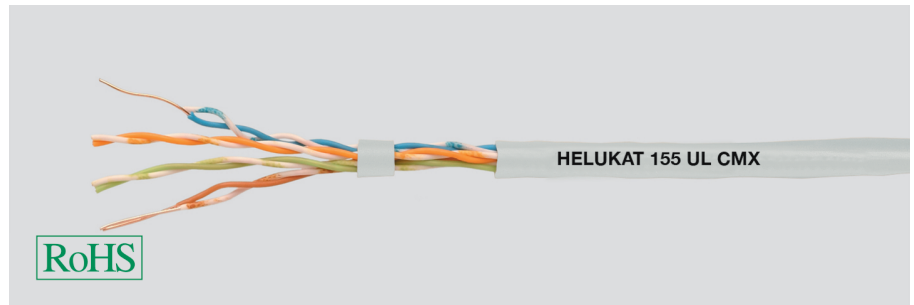


# LAN Cable

Category 5e

**HELUKAT® 155**


U/UTP UL



## Cable structure

Inner conductor Ø: 0,53 mm  
 Conductor material: Copper, bare  
 Core insulation: PE  
 Core colours: whbu/bu, whog/og, whgn/gn, whbn/bn  
 Separator: -  
 Screen over stranding element: -  
 Screen 1 over stranding: -  
 Screen 2 over stranding: -  
 Outer sheath material: PVC  
 Outer diameter: app. 5,2 mm  
 Outer sheath colour: Grey

## U/UTP 4x2xAWG 24/1 PVC, UL

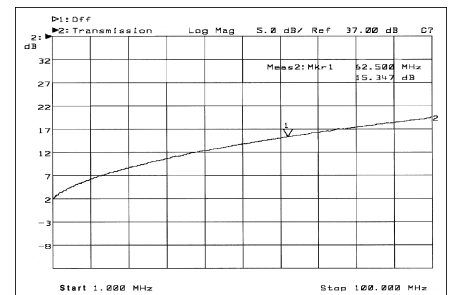

## Electrical data


Characteristic impedance: 100 Ohm ± 15 Ohm at 1 to 100 MHz  
 100 Ohm ± 20 Ohm at 101 to 155 MHz  
 Loop resistance: 190 Ohm/km max.  
 Mutual capacitance: 50 nF/km nom.  
 Rel. propagation velocity: 66 %

## Typical values

Frequency (MHz)	10	16	62,5	100	155
Attenuation (db/100m)	6,1	7,7	15,2	19,9	22,7
Next (db)	65,0	63,0	53,0	40,0	37,0
ACR (db)	58,9	55,3	37,8	20,1	14,3

## Technical data

Weight: app. 35 kg/km  
 bending radius, repeated: 42 mm  
 Operating temperature range min.: -20°C  
 Operating temperature range max.: +60°C  
 Caloric load, approx. value: 0,43 MJ/m  
 Copper weight: 17,00 kg/km

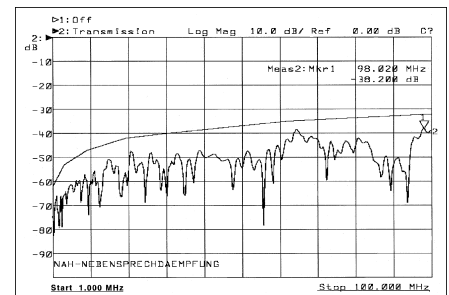

## Norms

Acc. to ISO/IEC 11801, Acc. to EN 50173, Acc. to EIA/TIA 568-A, Category 5e, Flame-retardant acc. to IEC 60332-1-2, Smoke density acc. to IEC 61034, CMX 444

## Application

HELUKAT® 155 data cables are used in the tertiary, but also in the secondary level of a network. They are characterized by large performance reserves and outstanding performance. They can be used to implement services such as Gigabit Ethernet, Fast Ethernet, Ethernet, ATM155, FDDI, token ring 4/16 Mbit/s, or ISDN absolutely trouble-free. Likewise, the mechanical characteristics are perfectly suited for the application in tight cable channels and platforms due to their optimized construction. This type is certified according UL because of the special PVC jacket

## Part no.

**802171**, U/UTP 4x2xAWG24/1 PVC UL (UTP)

Dimensions and specifications may be changed without prior notice.