

HELUTOP® HT-PA-EX

explosive area



For use in explosive areas.

Application

Zone 1, Zone 2, Zone 21, Zone 22, IIA, IIB, IIC

Material

Polyamide PA 6
Seal: Chloroprene-rubber (CR)
O-ring: chloroprene-rubber (CR)

- phosphor-free
- silicone-free
- cadmium-free

Note


Certificate of Conformity: IMQ 13 ATEX 010 X, IEC Ex IM2 13.003
Marking: Ex II 2GD Exe IIC Gb, Ex tb IIIC Db

Technical data

Protection class: IP 66 / IP 68 (EN 60529)
Impact-resistant: 4 Joule

Temperature range: -40°C up to +80°C

Test standard: EN 60079-0:2012 / EN 60079-7:2007 / EN 60079-11:2012 / EN 60079-31:2014 / IEC 60079-0:2011 / IEC 60079-7:2006 / IEC 60079-11:2011 / IEC 60079-31:2013

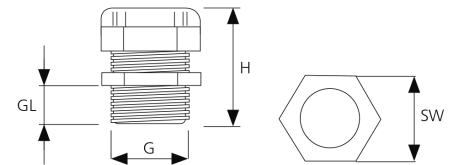

Part no. black	Size Metr.	Cable Ø from / to mm	Thread length mm	Spanner size mm	Height mm	Unit	Net EUR/ 100 items at a purchase of		
							up to 100	101 - 500	501 - 1000
906691	M20 x 1,5	6,0 - 12,0	10,0	24	39	50	o. r.	o. r.	o. r.
906938	M20 x 1,5	6,0 - 12,0	15,0	24	44	50	o. r.	o. r.	o. r.
906692	M20 x 1,5	10,0 - 14,0	10,0	27	41	50	o. r.	o. r.	o. r.
906939	M20 x 1,5	10,0 - 14,0	15,0	27	46	50	o. r.	o. r.	o. r.
906693	M25 x 1,5	13,0 - 18,0	10,0	33	47	25	o. r.	o. r.	o. r.
906940	M25 x 1,5	13,0 - 18,0	15,0	33	52	25	o. r.	o. r.	o. r.
906694	M25 x 1,5	11,0 - 17,0	8,0	29	43	50	o. r.	o. r.	o. r.
906695	M32 x 1,5	15,0 - 21,0	10,0	36	52	25	o. r.	o. r.	o. r.
906696	M32 x 1,5	18,0 - 25,0	15,0	42	56	25	o. r.	o. r.	o. r.
906697	M40 x 1,5	19,0 - 28,0	10,0	46	46	20	o. r.	o. r.	o. r.
906698	M40 x 1,5	22,0 - 32,0	18,0	53	69,5	10	o. r.	o. r.	o. r.
906699	M50 x 1,5	30,0 - 38,0	18,0	60	71,5	10	o. r.	o. r.	o. r.
906700	M63 x 1,5	34,0 - 44,0	18,0	65	71,5	10	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request