


SHIELDED FIRE RESISTANT DATA CABLE

Silicone Fire Barrier

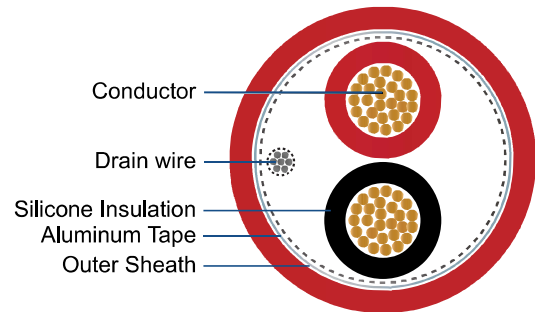

Description

- Multipair twisted cable with silicone fire barrier, Aluminum Mylar Tape Shield and Drain wire
- Low level of line attenuations and low mutual capacitances enable long transmission distances
- Packaged on Wooden Reel
- ISO 9001 : 2015, ISO 14001 : 2015 and RoHS compliant

Application

- Internal wiring of electronic equipment, transmission measurement and control signals with minimum noise.
- Industrial, Data, Interconnect
- Public Address, Fire Alarm systems
- Optimized for BMS system
- *This product is not permitted for use in power applications.*

Technical Data

Application standard	BS EN 50288-7:2005
Temperature range	-20° C to +90° C
Operating peak Voltage (not for power application)	300/ 500 V 600/1000 V (option available on request)
Test voltage	2000 V
Minimum bending radius	Fixed 7.5 x cable Ø
Insulation resistance	> 5000 MΩxkm
Mutual capacitance	C/C: < 100 pF/m C/S: < 200 pF/m
Inductance	< 0.3 mH/km
Impedance	60 Ω

Cable Structure

- **Conductor:** Bare copper conductor, multiple wired according to IEC 60228 (Class 2/ Class 5) or ASTM (B 3/ B 33).
- **Core Insulation (fire barrier):** Cross-linked ceramic forming polymer (Silicone) compound.
Cores are twisted together in pairs.
- **Overall Screen:** Aluminum Mylar tape over tinned copper stranded drain wire.
- **Outer sheath:** LSZH (acc. to EN 50290-2-27). Red color.


SHIELDED FIRE RESISTANT DATA CABLE

Silicone Fire Barrier

Tests

- Fire resistant according to IEC 60331-21
- Flame retardant according to IEC 60332-1-2
- Flame test on bunched wires according to IEC 60332-3-24 (Cat. C)
- Flame test on bunched wires according to IEC 60332-3-22 (Cat. A)
- Corrosiveness of combustion gases according to IEC 60754-2
- Smoke density according to IEC 61034-1
- Halogen-free according to IEC 60754-1
- Oil resistant according to IEC 60811-404
- Suitable for usage in explosive atmospheres acc. to IEC 60079-14 sec. 16.2.2

Part Number

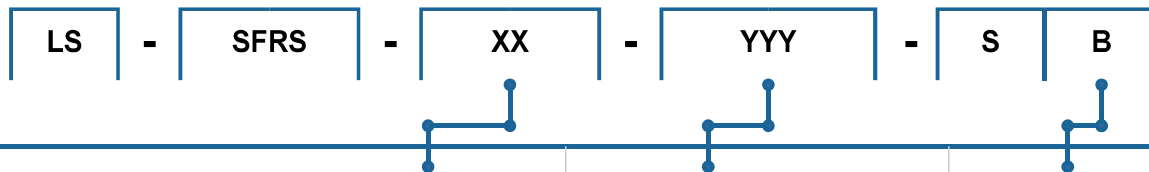

XX - Number of core

02 : 02 cores
04 : 04 cores
06 : 06 cores
... : ...
50 : 50 cores

YYY - Conductor size

050 : 0.50 mm² 14A : 14AWG
075 : 0.75 mm² 16A : 16AWG
100 : 1.00 mm² 18A : 18AWG
150 : 1.50 mm² 20A : 20AWG
250 : 2.50 mm² 22A : 22AWG

B - Outer Sheath

V : PVC
F : FR-PVC
Z : LSZH

* Other conductor sizes are available upon request: 125 (1.25mm²), 200 (2.00mm²), 24A (24AWG) ... etc.

Core Identification

02 cores: Black/ Red
04 cores: Black/ Red + Black/ White
06 up to 50(+) cores: Black + Numbered

AWG to mm²

The conductor is metrically (mm²) or American Wire Gauge (AWG) constructed.
The AWG to mm² conversion is approximate and purely informative.

AWG	mm ²	AWG	mm ²
20	0.5	14	2.5
18	0.75	12	4
17	1.0	10	6
16	1.5	8	10